

DIAMOND ANTENNA

DP-GH62

Two Section Co-Linear Ground-Plane Antenna


Specifications

Frequency:	Tunable, 50-54 MHz
VSWR:	1.5:1 typical
Bandwidth:	2 MHz for less than 2.0:1 VSWR
Gain:	6.0 dbd
Power Rating:	DP-GH62 200W (see notes)
Connector:	SO-239
Length:	6.4 meters (21 feet)
Weight:	2.7 Kg. (6 lbs.)
Rated Wind Speed:	35 m/sec. (80 mph)
Mast Diameter:	25-42 mm (1"—1 5/8")

Assembly Instructions


1. Attach Top Section (A) to Section B with sheet metal screws (provided).
2. Attach Section B to Section C.
3. Attach Section C to Middle Coil.
4. Attach bottom of Middle Coil to Section D.
5. Adjust lower element length (Section E and Section D) for best VSWR.

Length of Lower Radiator vs. Frequency

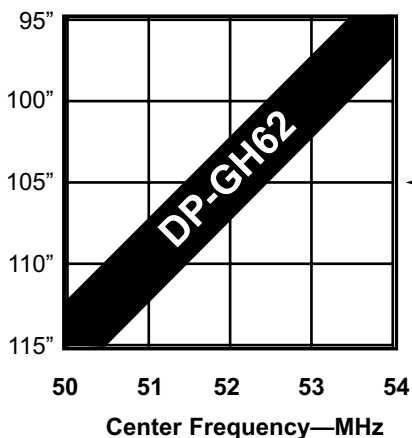

Notes:

For 500 watt (FM only; 52-54 MHz) capability, contact Diamond Customer Service at (770)614-7443 for further information.

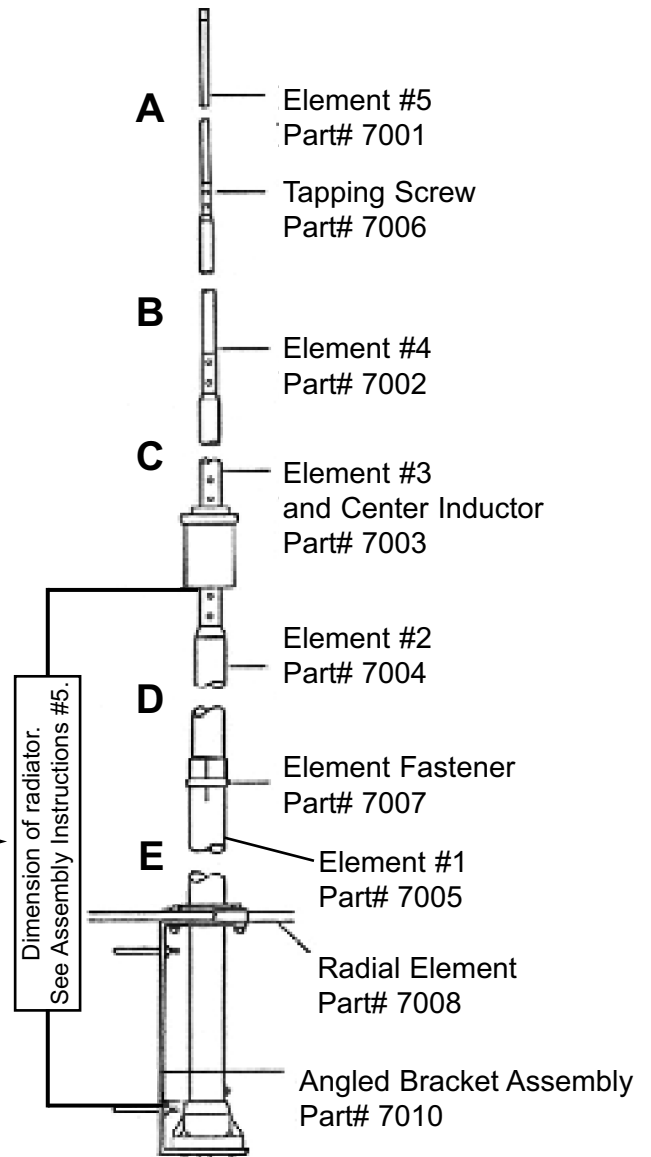

DIAMOND ANTENNA Products are distributed by RF PARTS COMPANY

435 S. Pacific Street • San Marcos, CA 92078 • (770) 614-7443

www.diamondantenna.net